
Contact: Eunice Email:sales06@winwinkiosk.com Whatsapp:+86 18818468928 5th Floor, Building B, Henghai industry park, Fenghuang Street, GuangMing Area, SZ, GD , China

Interactive Screen WW-650



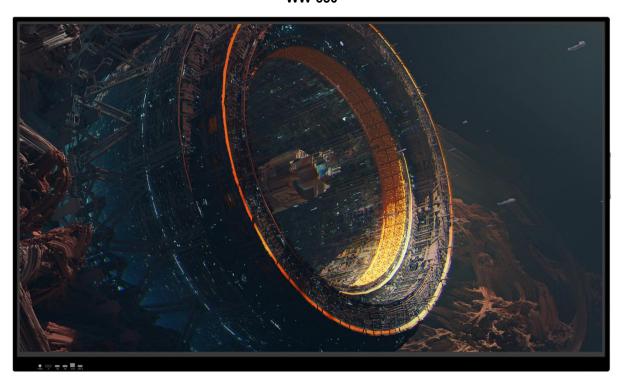

Contact: Eunice Email:sales06@winwinkiosk.com Whatsapp:+86 18818468928 5th Floor, Building B, Henghai industry park, Fenghuang Street, GuangMing Area, SZ, GD , China

Main Function

1.System properties:

- Equipped with Android 8.0 intelligent operating system and unique 4K UI design, all interface UI resolutions are 4K ultra-high definition;
- 4-core 64-bit high-performance CPU, Dual-core A73 and dual-core A53 1.5GHZ , the maximum supported clock is 1.5GHz;

2. Appearance and smart touch:

- Ultra-narrow 12mm frame design, the overall appearance is made of dark iron gray frosted material;
- Front detachable high-precision infrared touch frame, touch accuracy up to ±1mm, touch height
 1.0mm, support 20-point touch, high sensitivity;
- With OPS interface, dual systems can be expanded; one USB interface supports computer and Android sharing USB function;
- Network follow, support one network cable to Andriod, and OPS devices can access the Internet at the same time (optional);
- Various themes are changed, and the main interface countdown and famous quotes can be changed at will;
- External USB, the system automatically enters the USB authority, and the password can be unlocked to better protect the security of files

3. Writing on the whiteboard:

- 4K writing whiteboard, handwriting 4K ultra-high-definition resolution, delicate strokes;
- High-performance writing software, support single-point, multi-point and large and small pen color change, increase pen edge writing effect, etc., support whiteboard insertion of pictures, add pages, gesture board sassafras, zoom in, zoom out and roam, scan code sharing, any channel and any interface Annotation and other functions can be performed under it;
- The whiteboard page is infinitely zoomed, which can be undone and restored at will, with no limit on the number of steps;
- Explosion-proof tempered glass, Mohs 7 hardness, safe and secure, better writing experience;

4.Conference training:

- Built-in WPS, welcome interface, and other efficient conference software;
- Built-in 2.4G/5G dual-band, dual network card, support simultaneous use of wireless Internet access and WIFI hotspot;
- Wireless same screen, support multi-channel same screen, realize mirror control, video, music, document sharing, etc.;
- The external input signal source automatically recognizes and jumps, and the screen switching is easy and convenient;

Contact: Eunice Email:sales06@winwinkiosk.com Whatsapp:+86 18818468928 5th Floor, Building B, Henghai industry park, Fenghuang Street, GuangMing Area, SZ, GD , China

5. Commercial display:

- High-definition image processing engine: image motion compensation, color enhancement processing, point-to-point precision display technology;
- Intelligent all-in-one machine, compass five-finger touch screen to follow;
- Customize the boot screen, themes and backgrounds, and the local media player supports automatic classification to meet the needs of different occasions;
- The sidebar button, gesture calling method and touch control switch can be switched freely, turning the conference machine into an advertising display machine;
- Full-channel output function: output the real-time picture high-definition, stable and low-latency to the expansion device;
- One-key hardware self-test can be used to test modules such as network, RTC, temperature, light sensor, touch, system memory, and OPS;

Specification

	Size	65"
	Backlight type	D-LED
	Resolution	3840*2160
	Brightness	350cd/m²
	Contrast ratio	4000:1
	Response time	6ms
	Dot pitch	0.124×0.372 mm (H×V)
	Refresh rate	60 Hz
Panel	View Angle	178°(H) / 178°(V)
	Saturation (x% NTSC)	72 %
	Display area	1430mmx804mm
	Colors	1.07B(8bit)
	Screen life	30,000 hrs
Chip	Chipset	Android System
	os	Android 8.0
	CPU	Dual-core A73 and dual-core A53 1.5GHZ
Mainboard	GPU	G51MP

Contact: Eunice Email:sales06@winwinkiosk.com Whatsapp:+86 18818468928 5th Floor, Building B, Henghai industry park, Fenghuang Street, GuangMing Area, SZ, GD, China

	RAM	2 /3GB DDR4
	ROM	16/32 GB Standard
	Power	100 V ~ 240 V/AC, 50/60 Hz
Power supply	Max.power(without OPS)	≦260W
	OPS power	19V(DC)/5A
	Standby consumption	<0.5W
	Power switch (AC) input	*1
	Speaker power	8Ω/10W*2
Function	Power switch	*1
	Ethernet*	1* RJ45 standard socket
	VGA IN	1*DB15 type, 1* external standard socket
	AV IN	1* small socket
	MIC IN	1* small socket
	Earphone	1* earphone standard socket
	SPDIF	1x coaxial socket
	WIFI	2*5G built-in module
	HDMI IN	4* HDMI standard socket
	RS232 UART	1x DB9 standard block
	Media USB (muilt media)	4* USB 2.0 standard socket
	SD-card	1* little socket
	TOUCH USB	1* Standard Type USB2.0 B port,1* Standard Type
	Working TEMP	0℃ ~40℃
	Storage TEMP	-10℃ ~ 60℃
For decay and	Working humidity	20% ~ 80%
Environment	Storage humidity	10% ~ 60%
	Recommended max usage	18Hours*7days
	N/W	38Kg±1.5Kg

Contact: Eunice Email:sales06@winwinkiosk.com Whatsapp:+86 18818468928 5th Floor, Building B, Henghai industry park, Fenghuang Street, GuangMing Area, SZ, GD , China

	G/W	45Kg±1.5Kg(carton)
Structure	Product dimension (L*W*H)	1488.4mm*892mm*91.55mm (not including bracket)
Structure	Packing dimension (L*W*H)	1600mm*1030mm*200mm(Carton)
	VESA hole site	4-M8 Screw hole 400mmx400mm
	Frame & shell material	Aluminum profile / sheet metal
Frame & shell color B		Black (Silver frame /full silver)
Language	OSD Menu	Chinese/English more than 10 languages
	Wifi Antenna	*4
	Whiteboard pen	*1
	Remote controller	*1
	User manual	*1
	Quality certificate / warranty	*1
Accessories	1.5m power cable	*1
	Wall mount rack (including	*1 (set)
	Screen projector	*1 (optional)
	Infrared smart pen	*1 (optional)

Touch Screen Writing System

1.Product description

High-precision infrared touch frame, the resolution through interpolation algorithm can be as high as 32768×32768; support plug and play; this product can optionally support twenty-point touch

2.Main Specification

Touch Parameters	Touch Specifications	Infrared Touch Frame
	Glass specification	4mm tempered glass
	Response speed	≤6ms
	Touch accuracy	90% center area accuracy ± 1mm, 10% edge area accuracy ± 3mm
	Touch diameter	≥3mm

Contact: Eunice Email:sales06@winwinkiosk.com Whatsapp:+86 18818468928 5th Floor, Building B, Henghai industry park, Fenghuang Street, GuangMing Area, SZ, GD , China

	Input method	Finger or special pen
	Theoretical number of clicks	Unlimited
Interface Type	USB 2.0 Full Speed	
Working voltage	4.75∼5.25V	
Power consumption	≤2 W	

3. Product model: infrared smart pen (optional)

It is a multi-functional smart pen that can provide users with a user-friendly interactive experience and is widely used in education, training, business, conferences and other fields




Contact: Eunice Email:sales06@winwinkiosk.com Whatsapp:+86 18818468928 5th Floor, Building B, Henghai industry park, Fenghuang Street, GuangMing Area, SZ, GD , China

3.1 Specification

Item	Description
Bluetooth technology	BLE 4.1, Open environment up to 15 meters
Pressure sensing	2048 series original handwriting experience
Electrical Characteristics	Charging voltage 5V, Charging current <125MA Charging port: USB Type-C
Compatible interface	Support USB3.0/2.0/1.1
Windows 10, version 1709 and above	
	(1) One-click to call writing whiteboard or other PPT applications
	(2) 2048 pressure-sensitive original handwriting experience
	(3) PPT one-key full screen, page up and down, one-key exit
System	(4) Office original ecological annotation and annotation preservation
Requirements/Feature	(5) Freely switch the four flying squirrel functions in the air (flying squirrel,
	spotlight, magnifying glass, laser pointer)

Contact: Eunice Email:sales06@winwinkiosk.com Whatsapp:+86 18818468928 5th Floor, Building B, Henghai industry park, Fenghuang Street, GuangMing Area, SZ, GD , China

3.2 Function

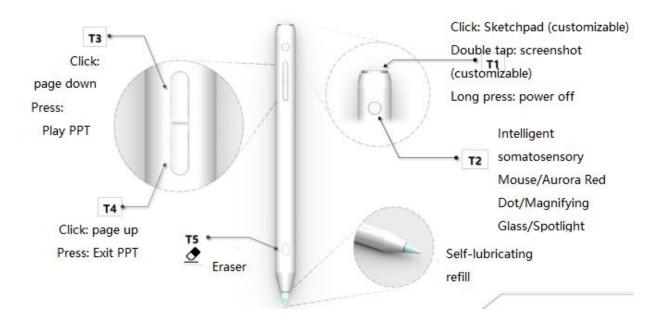

4. Product model:

wireless screen synchronization device (optional)

Contact: Eunice Email:sales06@winwinkiosk.com Whatsapp:+86 18818468928 5th Floor, Building B, Henghai industry park, Fenghuang Street, GuangMing Area, SZ, GD, China



4.1 Specification

Item	Parameter	PTB1208 Parameter value
1	Wi-Fi module	5GHz/2.4GHz
2	Wi-Fi bandwidth	867MHz
3	Startup time	<15s
4	Screen projection response time	≤3s
5	Preemption response time	≤2s
6	Support system	Windows7/8/10 Mac OS
7	Operation mode	Plug and play, one-key screen projection
8	Pairing method	Insert into the USB port of the receiving end and automatically pair
9	Transmission resolution	1920 X 1080
10	Frame rate	30fps and below
11	Power supply interface	USB2.0、3.0
12	Video transmission interface	USB2.0、3.0

Contact: Eunice Email:sales06@winwinkiosk.com Whatsapp:+86 18818468928 5th Floor, Building B, Henghai industry park, Fenghuang Street, GuangMing Area, SZ, GD , China

13	Pairing method	Insert into the USB port of the receiving end and automatically pair
14	Touch return	10 points@Windows/Mac OS
15	Net weight	88±5g
16	Temperature	Operation: +5°C to +38°C (+41°F to +104°F)
	Range	Storage: -20°C to +50°C (-4°F to +104°F)
17		Operation: 0 to 90% relative humidity,
	Humidity	non-condensing
		Storage: 0 to 85% relative humidity, non-condensing

Drawing (wall mount hole 400*400)

